



DESCRIPTION

The Combi-Cam (P/N 10-2828) is a combination solid metal cam lock with up to 1,000 possible combinations. The Combi-Cam can easily replace the standard keyed cam-lock provided on all Fike enclosures using the following installation procedure.

INSTALLATION PROCEDURE

1. Remove the existing lock mechanism from the door panel.
2. Keep the existing hook cam as it will be reused.
3. If desired, the lock can be installed such that the combination is nonresettable. Simply rotate the lock body 180 degrees prior to installation. Verify that the code reset button is no longer accessible.
4. Insert the Combi-Cam lock body through the cam hole provided in the door panel.
5. Thread cylinder nut onto the lock body and tighten.
6. Attach stop cam onto lock body. See Figure 2.
7. Attach existing hook cam and secure with screw and lock washer.

COMBINATION SETTING

The combination is factory set at >0-0-0<. Combination must be on opening number prior to resetting.

1. Locate the code reset button on the underside, outer edge of the lock.
2. Rotate the face of cam until the code reset button comes into view.
3. Using the end of a paper clip, push this pin in and hold.
4. Set your personal combination by turning the dials to the desired combination.
5. Release the button to set the combination.
6. To lock, rotate the lock to the "locked" position. Rotate one or more dials after lock is closed.
7. To unlock, turn dials to your personal combination.

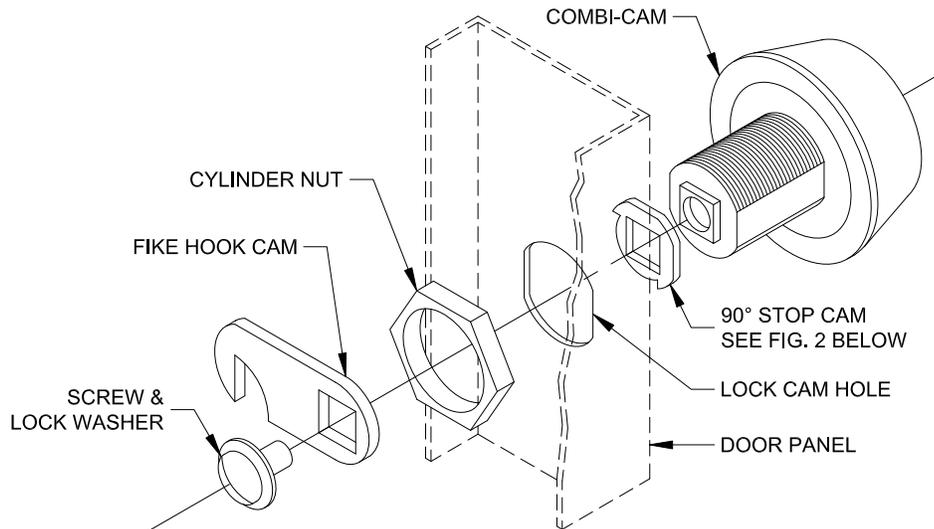


Figure 1 Lock Mechanism Installation



Figure 2 Stop Cam Placement