

ENCLOSURE KIT – MOXA[®] DEVICES



Features

- Removeable, reversible door that opens 120°
- Carbon steel mounting plate with 35mm DIN-rail
- Removeable cable gland plate
- Surface mounting using four mounting holes provided in enclosure backbox

General

The enclosure kit (P/N 10-3049) provides a mounting point for the MOXA devices used in conjunction with Fike's addressable control panels. The enclosure is equipped with a mounting plate with pre-mounted DIN-rail that accommodates the installation of up to six MOXA fiber converters or one MOXA NPort server within the enclosure.

MOXA devices are ordered separately. A removable gland plate is provided in the enclosure to facilitate easy installation of field wiring.

Specifications

Construction:	Steel, single piece body
Finish:	Epoxy-polyester powder
Color:	Grey (RAL 7035)
Shipping weight:	7.89 lbs. [3.58 Kg]
IP Rating:	IP66 IEC 60529
MOXA device qty.:	6, ICF-1150i fiber converters ^{1,2} 1, 5130A serial device server ^{1,3}

¹ Purchased separately.

² Refer to data sheet P.1.248.01 for component details.

³ Refer to data sheet P.1.250.01 for component details.


Approvals

- Underwriters Laboratories

For exact certification listings, please reference the respective agency web site.

This document is only intended to be a guideline and is not applicable to all situations. Information is subject to Fike's full disclaimer at <http://www.fike.com/disclaimer>.

Product Dimensions

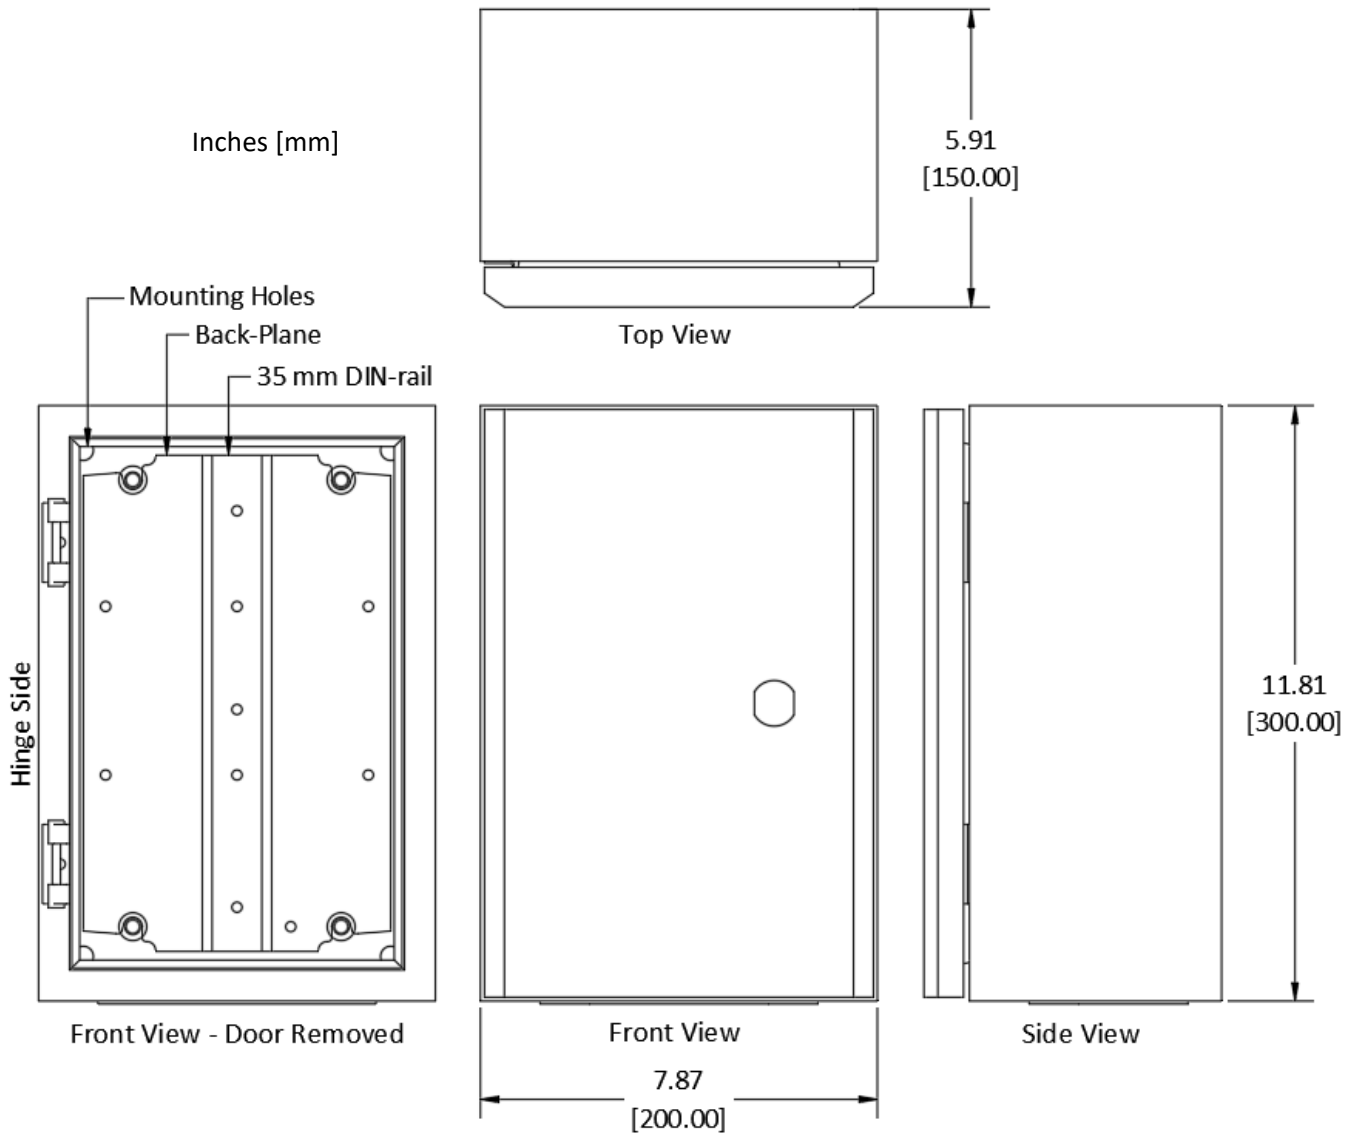

This document is only intended to be a guideline and is not applicable to all situations.
Information is subject to Fike's full disclaimer at <http://www.fike.com/disclaimer>.