

ADDRESSABLE MANUAL CALL POINT

DESCRIPTION

The Addressable Manual Call Point (MCP) is a 'resettable' style MCP that has the option of being flush fitted if required. Once operated the device latches into the alarm position and requires manually resetting via a special key. The device has been designed to fit a standard UK single gang deep (47mm min) back box and each MCP comes supplied with a flush fitting adaptor. The device is fitted with a single colour red LED to indicate activation. Short circuit isolators are also built into the device in order to protect the system in the event of a cable fault.

This MCP is compatible with Fike's SITA200plus, Duonet and Quadnet intelligent control panels. Its operating parameters are configured using the panel's programming software and are stored within the Flash memory in the device. This on-board intelligence allows each device to report and respond directly to the control panel without having to wait until it is polled. This enhanced digital protocol means less information is needed to be sent between the device and the host control panel, resulting in faster, more reliable communication.


SPECIFICATIONS

Dimensions:	Width x Height: 88mm x 88mm Depth: Standard inc base 52mm Depth: Flush mounted 25mm
Operating Temperature:	-10°C to +50°C.
Voltage Range:	24V to 42V DC
LED Indication:	Activated: 0.3 Second Interval
System Compatibility:	SITA200plus: V2.00 onwards Duonet and Quadnet: V1 onwards
Battery Current @ 24V DC:	Quiescent: 0.18mA Active: 5.96mA
Device Loading Unit Rating:	3



APPROVALS:

- LPCB - 331j/01, 331j/02, 331j/03 and 331j/04
- Approved to: EN54 Part 11 and Part 17

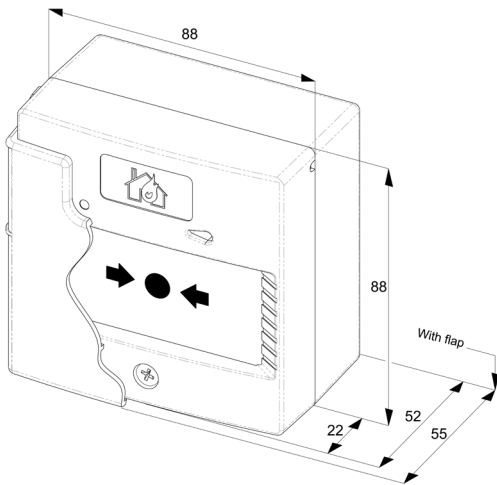

(All measurements shown are in millimetres)

ORDERING INFORMATION

Fike P/N	Description
403 0006	Manual Call Point - RED

TERMINAL DEFINITIONS

RED (R)	(+) Loop In	BLUE (B)	(-) Loop In / Out
YELLOW (Y)	(+) Loop Out	E	Loop Screen In / Out

(This page is left blank intentionally)