

DUCT DETECTOR REMOTE ACCESSORIES

DESCRIPTION

The NS Duct Detector Remote Accessories are designed to be used with the Conventional and Analog Duct Detectors to provide audible and visual indication as well as remote test/reset functions.

These devices are constructed of brushed stainless steel and mount on a standard single or double gang backbox.

SPECIFICATIONS

Power Requirements: Alarm LED: 15 ma
(provided by Duct Detector) Pilot LED: 15 ma
Horn: 20 ma @ 24 VDC
Sound Pressure: Horn: 78 db @ 10 feet
Dimensions: Single Gang: 2.75" (69.85mm) W x 4.5" (114.3mm) H
Double Gang: 4.5" (114.3mm) W x 4.5" (114.3mm) H

Fike P/N 63-034 (MS-RA)

Function: Remote Alarm LED (red)
For use with: 63-030, 67-029, 63-031, 67-030, 63-028, 63-029

Fike P/N 63-036 (MS-KA/R)

Function: Remote Alarm LED (red)
Key-Operated Test/Reset Switch
For use with: 63-030, 67-029, 63-031, 67-030, 63-029

Fike P/N 63-035 (MS-RA/P)


Function: Remote Alarm LED (red)
Pilot LED (green)
For use with: 63-030, 67-029, 63-031, 67-030, 63-029

Fike P/N 63-037 (MS-KA/P/R)

Function: Remote Alarm LED (red)
Pilot LED (green)
Key-Operated Test/Reset Switch
For use with: 63-030, 67-029, 63-031, 67-030, 63-029

Fike P/N 63-038 (MS-RH/KA/P/R)

Function: Remote Alarm Horn
Remote Alarm LED (red)
Pilot LED (green)
Key-Operated Test/Reset Switch
For use with: 63-030, 67-029, 63-031, 67-030

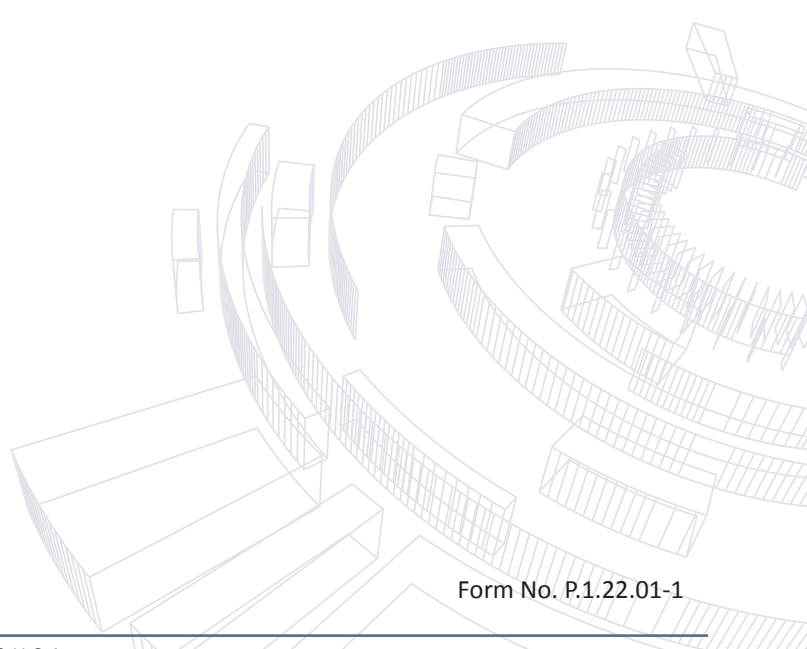

Form No. P.1.22.01-1

(This page is left blank intentionally)