

# **DATA SHEET**

# CO, BAFFLE AND RADIAL NOZZLES

## DESCRIPTION

#### **Baffle Nozzle**

The Baffle Nozzle is used for total flooding applications only. The nozzle should be located around the perimeter of the protected space. Each nozzle provides a 180° discharge pattern within the protected space.

The Baffle nozzle is made of brass and is available with orifice codes of (1) through (13.5). Nozzle strainers (P/N C02-1181) are required on any nozzle with an orifice code requirements of 3 or smaller. The baffle nozzle has a 1/2" (15 mm) pipe thread.

Nozzle Strainers do not come with the Baffle Nozzle and must be ordered separately. (Refer to Nozzle Strainer detail).

#### **Radial Nozzle**

The Radial Nozzle is used for total flooding applications. The nozzle(s) can be located around the perimeter or in the center of the protected space. The 3 orifice Radial nozzle is designed for a 180° discharge pattern and the 4 orifice Radial nozzle is the 360° discharge pattern nozzle.

The Radial nozzle is made of brass and is available in 1/2", 3/4" and 1" (15, 20 and 25 mm) sizes with orifice codes from 3.5 to 25.

Nozzle Strainers (P/N C02-1181) do not come with the Radial nozzle and must be ordered separately for nozzles with a discharge orifice of 7 or smaller.

### **ORDERING INFORMATION**

Fike P/N	Size (IN)	Size (mm)	Configuration		
Radial Nozzle					
C80-041	1/2	15	360°		
C80-042	1/2	15	180°		
C80-043	3/4	20	360°		
C80-044	3/4	20	180°		
C80-045	1	25	360°		
C80-046	1	25	180°		
Baffle Nozzle					
C80-030	1/2	15	180°		
Strainer					
C02-1181	Strainer for Radial and Baffle Nozzle				







#### **APPROVALS:**

- FM Approved 0D8A9.AF
- ULC Listed CEx 1312
- USCG 162.038/12/0






# BAFFLE NOZZLE DETAIL

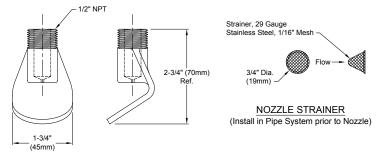

BAFFLE NOZZLE

# RADIAL NOZZLE WITH STRAINER DETAIL

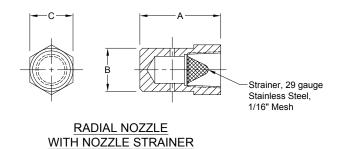

#### **NOZZLE DIMENSIONS**

	1/2" NPT	3/4" NPT	1" NPT
Dimension "A"	1 7/8"	2 3/16"	2 1/2"
	(48 mm)	(56 mm)	(65 mm)
Dimension "B"	1"	1 1/4"	1 1/2"
	(25 mm)	(32 mm)	(38 mm)
Dimension "C"	1"	1 1/4"	1 1/2"
	(25 mm)	(32 mm)	(38 mm)