


## PROINERT®2 CHECK VALVE

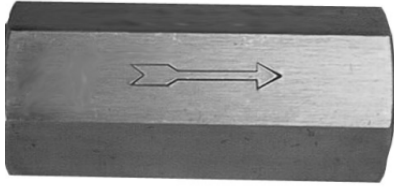

### Description

Check valves are used to isolate the main and reserve cylinders in a system with a connected reserve. The valve prevents pressurization of the reserve bank of cylinders by blocking the flow of agent from the main system discharge piping. This allows a common discharge manifold and piping network to be used.

### Specifications

Body Material	Brass (1/2" – 3")
	Stainless Steel (4")
Connection	NPT Threads
Seat Material	Buna-N
Spring Material	316 Stainless Steel
Spring Cracking Pressure	0.500 psi (0.034 bar)

### Ordering and Dimensions

Part Number	Nom. Size (NPT)	Length in. (cm)	Diameter in. (cm)
C02-1204	1/2"	2.75 (7.0)	1.00 (2.5)
C02-1205	3/4"	2.98 (7.6)	1.25 (3.2)
C02-1206	1"	3.64 (9.2)	1.63 (4.1)
C02-1207	1-1/2"	4.63 (11.8)	2.50 (6.35)
C02-1240	2"	5.85 (14.9)	3.00 (7.6)
C02-1393	3"	6.25 (15.9)	4.50 (11.4)
C02-1394	4"	7.13 (18.1)	5.50 (14.0)

### Approvals

Underwriters Laboratories (UL)  
 Underwriters Laboratories of Canada (ULC)  
 Factory Mutual (FM)

*For exact certification listings, please reference the respective agency web site.*

This document is only intended to be a guideline and is not applicable to all situations. Information is subject to Fike's full disclaimer at <http://www.fike.com/disclaimer>.